



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

PCT/IB 0-3 / 0 2 7 8 4
17.06.03

REC'D 24 JUL 2003

WIBB

PAT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02014411.9

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

16/12/02

BEST AVAILABLE COPY



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

**Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation**

Anmeldung Nr.:
Application no.:
Demande n°: 02014411.9

Anmeldetag:
Date of filing: 28/06/02
Date de dépôt:

Anmelder:
Applicant(s):
Demandeur(s):
International Business Machines Corporation
Armonk, NY 10504
UNITED STATES OF AMERICA

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Link adaptation

In Anspruch genommene Priorität(en) / Priority(les) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing:
Etats contractants désignés lors du dépôt:

AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR

Bemerkungen:
Remarks:
Remarques:

CH920020023

- 1 -

LINK ADAPTATION

TECHNICAL FIELD

The present invention is related to an apparatus and method for adapting transmission parameters to the current quality of a transmission channel. More particularly, the invention allows to adapt a variable data rate or a packet length or both to the channel conditions in a wireless local area network.

BACKGROUND OF THE INVENTION

Wireless local area networks (WLANs) have been designed for data communication and have found widespread acceptance and proliferation in the industry. Two wireless broadband LANs (WLANs) are standardized in the 5 GHz band, namely IEEE 802.11a and ETSI HIPERLAN/2. The physical layers of both standards are very similar: they both use a modulation technique called "Orthogonal Frequency Division Multiplexing (OFDM)" and can provide up to 8 different transmission modes with data rates ranging from 6 Mbps up to 54 Mbps. This multi-rate capability enables a WLAN station to select a transmission mode which is best appropriate to the current radio channel quality to reach the best performance.

In general, adaptive adjustment of the transmission rate is achieved by having a receiver estimating the channel link quality, deriving from this estimation the rate to be used in future transmissions, and sending this information back to the transmitter. The main issues for an efficient link adaptation mechanism are the determination of the parameters to be used for the link quality estimation, e.g. packet error rate, signal to noise ratio, received signal strength, carrier to interference ratio, etc., how to measure them, and how to select the appropriate rate out of the measurement results.

In HIPERLAN/2, it is the responsibility of an Access Point (AP) to dynamically select any of the available PHY (physical layer) modes for the down- and uplink transmissions. A Mobile Terminal (MT) continuously measures the quality of the downlink and suggests a suitable downlink transmission rate to the AP. For the uplink the AP itself performs the

CH920020023

- 2 -

- link quality estimation. The standard however does not specify how the link quality estimation and the corresponding transmission mode selection are performed. S. Simoens and D. Bartolomé describe in their article "Optimum performance of link adaptation in HIPERLAN/2 Networks", VTC 2001, a method for estimating the SNIR (Signal to Noise plus Interference Ratio) and based on this estimation determining the transmission rate that would maximize the throughput of an HIPERLAN/2 network. Similarly, Z. Lin, G. Malmgren, and J. Torsner studied in their article "System Performance Analysis of Link Adaptation in HiperLAN Type 2", VTC Fall 2000, the performance of the link adaptation of HIPERLAN/2 when using a C/I (Carrier to Interference ratio) as link quality parameter.
- 5
- 10 The standard IEEE 802.11 only specifies which transmission rates are allowed for which types of MAC (medium-access-control layer) frames, but not how and when to switch between the permitted rates. Furthermore, there is no signaling mechanism specified which would allow a receiver to inform the transmitter about the quality of the communication channel or the rate to be used. The transmitter can change the rate at any
- 15 time between two consecutive packets, but not in the middle of a sequence of MAC frames belonging to the same packet. The rate at which a MAC frame is transmitted is coded in the header of the physical layer (the so-called PLCP header) which is sent at a fixed rate (6 Mbps in case of IEEE 802.11a) supported by all stations. Thus, after having decoded successfully the PLCP header, the receiver switches to the indicated rate to
- 20 receive the MAC frame.

- Although IEEE 802.11 WLANs are becoming more and more popular, little has been published about the rate adaptation techniques that could be applied to those networks. A. Kamerman and L. Montean describe in "WaveLAN-II: A High-Performance Wireless LAN for the Unlicensed Band", Bell Labs Technical Journal, Summer 1997, pp. 118-133,
- 25 a method used in Lucent's WaveLAN-II devices. It is basically an automatic method for switching between two transmission rates, with the high one as the default operating rate. The device switches automatically to the low rate after two consecutive transmission errors and back to the high rate either after ten successful transmissions or after a time out.

- As mentioned above, the IEEE 802.11 standard does not specify how rate switching
- 30 should be executed in case of multi-rate PHY layers. It only specifies which rates have to

CH920020023

- 3 -

be used for sending which MAC frames. It even does not provide any protocol means for a receiver to inform the transmitter about the actual link quality or the transmission rate to be used. That is why the link adaptation method described by G. Holland et. al. in "A Rate-Adaptive MAC Protocol for Multi-Hop Wireless Networks", ACM/IEEE
5 International Conference on Mobile Computing and Networking (MOBICOM'01) Rome, Italy, July 2001, cannot be applied to current IEEE 802.11 WLANs, since it is based on the principle that the receiver determines the link quality and requests the transmitter to switch to a more appropriate rate.

10 From the above it follows that there is still a need in the art for an improved and efficient link adaptation method. Moreover, only information available at the transmitter side should be sufficient to guess whether the actual link quality is improving or worsening.

CH920020023

- 4 -

SUMMARY AND ADVANTAGES OF THE INVENTION

In accordance with the present invention, a method for adapting a transmission parameter in a transmitting node of a data communication system to the current link quality of a data communication channel is provided. The adapted transmission parameter is selected by
5 the transmitting node from a set of transmission parameters in dependence on a number of successful transmissions s . The number of successful transmissions s is compared in the transmitting node against one of a first value s_1 corresponding to a first state of the transmitting node and a second value s_2 corresponding to a second state of the transmitting node. The method comprises in the transmitting node the steps of (a) counting
10 the number of successful transmissions s ; (b) selecting the adapted transmission parameter (b1) in response to the number of successful transmissions s equaling or exceeding the first value s_1 when the transmitting node is in the first state, and (b2) in response to the number of successful transmissions s equaling or exceeding the second value s_2 when the transmitting node is in the second state; and in dependence of the result of a following
15 transmission, operating the transmitting node in one of the first state and the second state. The first value s_1 is hereafter also referred to as first threshold value s_1 and the second value s_2 is hereafter also referred to as second threshold value s_2 .

Preferably, the second threshold value s_2 is larger than the first threshold value s_1 , because then the first state can correspond to a link with fast changing quality and the
20 second state can correspond to a link with slow changing quality.

In an embodiment the method can be used for adapting a variable data rate to the link quality, thereby supporting multiple transmission rates. Selecting the adapted transmission parameter in step (b) which is also contemplated as switching to the adapted transmission parameter then comprises switching to a different data rate. This allows the adaptation of
25 the variable data rate to present channel conditions. In a further embodiment, the step of selecting the adapted transmission parameter can further comprise selecting a higher data rate from several data rates. Also a packet length different to the length employed before can be used. Moreover, the variable data rate, the different packet lengths, or other parameters can be combined. This shows the advantage that several transmission
30 parameters can be adapted to the respective channel conditions.

CH920020023

- 5 -

The step of operating the transmitting node in the second state further comprises the transition to the first state in the event of a faulty transmission. This has the advantage that it can be switched directly from the second state to the first state, thereby coping with fast changing channel conditions.

- 5 Setting the first threshold value s_1 to 3 and the second threshold value s_2 to 10 leads to an excellent performance in time-varying channels.

- The method can further comprise counting a number of faulty transmissions f and selecting the adapted transmission parameter at a threshold of the number of faulty transmissions f_T . This has the advantage that also faulty transmissions are considered and a
10 suitable reaction, e.g. reducing the data rate, can be applied accordingly. In other words, it can, for example, mean switching to a lower data rate immediately after one faulty transmission.

Setting the threshold of the number of faulty transmissions f_T to 1 leads to desirable results.

- 15 The method can further comprise selecting the transmission parameters used by a responding node, also referred to as responding receiver or station. For example, the data rate used by that station is taken into account. This allows to use this rate immediately for further communication and can be done as follows. When the transmitting node or station, also referred to as transmitter, receives a frame correctly from a peer station, i.e. the
20 receiver, it checks whether that frame was sent with a rate different to the one it uses currently for transmitting frames to that station. If this is the case, the transmitter may update its transmission rate with the one used by the peer. In an preferred embodiment, the transmitter only updates if the transmission rate used by the peer is higher.

- 25 The method provides basically a dynamic link adaptation mechanism that can be implemented in a compatible way with the current IEEE 802.11 MAC specification. Using the mechanism, an IEEE 802.11 compliant transmitter is able to detect whether the quality of a link to a certain destination is improving or declining, and based on this information to select and switch to the adapted transmission parameters, respectively.

CH920020023

- 6 -

In general, the link adaptation mechanism employs the fact that the transmitter does not receive an ACK (acknowledgment) for a data frame sent to a certain receiver as an indicator that the quality of the link to that receiver has worsened and therefore, e.g. a lower transmission rate should be used for future transmissions to that receiver. On the other hand, if the transmitter succeeds to send multiple data frames to a certain receiver, it assumes that the quality of the link has improved and therefore, e.g. a higher rate should be used for future transmissions.

It is advantageous that the mechanism employs only information available at the transmitter side to determine whether the actual link quality is improving or worsening and therefore first does not require the availability of a feedback channel and second remains conform to the standards. This can be achieved by the so-called error recovery procedure defined in the MAC (medium access control) layer of the IEEE 802.11 standard.

The link adaptation method described above can be implemented by having the transmitter maintaining for a certain destination MAC address two counters, one for successful transmissions and one for failed transmissions. If a frame is successfully transmitted, the success counter is incremented by one and the failure counter reset to zero; similarly, if a transmission fails, then the failure counter is incremented by one and the success counter reset to zero. If the failure counter reaches a certain threshold f_r , then the transmission rate for the corresponding destination is decreased and the failure counter reset to zero. Similarly, if the success counter reaches a certain threshold s_r , i.e. the first threshold value s_1 or the second threshold value s_2 , then, for example, the transmission rate is increased and the success counter reset to zero.

In accordance with another aspect of the present invention, there is provided an apparatus for adapting a transmission parameter to the current link quality of a data communication channel. The adapted transmission parameter is selected from a set of transmission parameters in dependence on a number of successful transmissions s . The number of successful transmissions s is compared against a first threshold value s_1 corresponding to a first state of the apparatus or a second threshold value s_2 corresponding to a second state of the apparatus. The apparatus comprises a success counter for counting the number of

CH920020023

- 7 -

successful transmissions. The apparatus further comprises a selecting unit for selecting the adapted transmission parameter in response to the number of successful transmissions s equaling or exceeding the first threshold value s_1 when the apparatus is in the first state and in response to the number of successful transmissions s equaling or exceeding the second threshold value s_2 when the apparatus is in the second state. Moreover, the apparatus comprises a decision unit 14 which in dependence of the result of a following transmission informs the selecting unit 12 to operate in the first state or the second state.

Furthermore, the apparatus can comprise a failure counter for counting a number of faulty transmissions, which allows to react on failures in transmission immediately.

CH920020023

- 8 -

DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the invention are described in detail below, by way of example only, with reference to the following schematic drawings.

- 5 **FIG. 1** shows a schematic illustration of a communication environment with a transmitting station and a receiving station.
- FIG. 2** shows a schematic illustration of a state transition diagram as it is applicable by the transmitting station.
- FIG. 3** shows a schematic illustration of the IEEE 802.11a performance in a time-varying channel.
- 10 The drawings are provided for illustrative purpose only and do not necessarily represent practical examples of the present invention to scale.

CH920020023

- 9 -

DETAILED DESCRIPTION

Although the present invention is applicable in a broad variety of transmission applications it will be described with the focus put on an application to wireless systems, i.e. Wireless Local Area Networks (WLAN), using orthogonal frequency division multiplexing (OFDM) as employed in the WLAN standards IEEE 802.11a and HIPERLAN/2. Before embodiments of the present invention are described, some basics, in accordance with the present invention, are addressed.

As the invention takes advantage of the so-called error recovery procedure defined in the MAC (medium access control) layer of the IEEE 802.11 standard, this error recovery procedure is described in more detail below.

The IEEE 802.11 basic access procedure is a distributed procedure based on the known Carrier Sense Multiple Access (CSMA) method used in Ethernet LANs (local area networks). A station with a pending data packet has to sense the state of the wireless medium before it can transmit. If the medium is free longer than a predefined time interval, it can proceed with the transmission. Otherwise it first waits until the medium becomes free, then generates a random backoff time before it tries to transmit to minimize the probability of collision with other stations. MAC (medium access control) frames are protected against errors (due to transmission errors or collisions) by means of a frame check sequence (FCS) field containing a 32-bit cyclic redundancy checksum (CRC) and of a simple send-and-wait automatic repeat request (ARQ) mechanism. If the receiver of a MAC frame detects a CRC error, the frame is discarded. Otherwise, if a MAC (medium access control) frame does not contain a CRC error, the receiver waits for a short, predefined SIFS (Short Inter-Frame Space) time and sends an ACK (acknowledge) frame back to the transmitter. If the transmitter does not receive an ACK frame within a specified time, it assumes that the transmitted frame is disturbed and will resend the frame after a random backoff time. The procedure is repeated until the transmitter receives an ACK frame from the receiver, or a maximum life time or a maximum number of retries is reached.

Generally, the performance and efficiency of the presented link adaptation mechanism depends on the thresholds for the number of successful transmissions s and faulty

CH920020023

- 10 -

transmissions f . A successful transmission is considered as a reception of an ACK frame. In the event that no ACK frame is received in due time a faulty transmission is assumed. In particular, a success threshold value s_T is represented by a first threshold value s_1 that corresponds to a first state H or a second threshold value s_2 that corresponds to a second state L for the number of successful transmissions s . A failure threshold value f_T is set for the number of faulty transmissions f . The impact of these values is considered below.

With the failure threshold value f_T of the number of faulty transmissions f one can control how long a transmitter should stay, e.g., at a certain rate before it can assume that the link quality is degraded so that it should switch to a lower rate. A high value of the failure threshold value f_T may impact the performance negatively, in particular when the link quality is degrading rapidly. Various simulation runs have shown that a good value for the failure threshold value f_T is one, i.e. the transmitter should switch immediately to a lower rate after a failed transmission, regardless how fast the quality of the link is changing. The efficiency of a such conservative reaction, even when the quality is changing very slowly or not at all, is explained by the fact that transmissions at a lower rate always have a higher success chance, in particular when the quality of the channel has really worsened.

The success threshold value s_T , which can equal the first threshold value s_1 or the second threshold value s_2 , defines the maximum number of successful transmissions s which the transmitter should achieve before it can assume that the link quality has improved so that it should switch, e.g., to the next higher data rate. Simulation results reveal that the efficiency of the link adaptation mechanism is sensitive to the value of the success threshold value s_T and therefore to its first threshold value s_1 and its second threshold value s_2 . With reference to Figure 3 the throughput of a point-to-point link can be represented as a function of the so-called Doppler spread, which is defined as the maximum frequency at which the channel conditions are changing. Low Doppler spread values correspond to links with slowly changing quality and high Doppler spread values correspond to links with fast changing quality. When the link quality is changing slowly, a large value for the success threshold value s_T leads to a better throughput performance. However, it has been recognized that with a large value for the success threshold value s_T the transmitter does not react fast enough to a fast improvement of the link quality. The

CH920020023

- 11 -

transmitter is still at a low transmission rate although the quality of the link already allows the use of a higher rate.

With reference to Fig. 1, a general layout of a communication system 8 is described in which the adaptation of a transmission parameter in a transmitting node 1 to the current
5 link quality of a data communication channel 7 can be used. As indicated in Fig. 1, a signal can be transmitted via the channel 7. Usually, the signal comprises a frame or several frames. The presented embodiment relates to the IEEE 802.11a standard supporting an Orthogonal Frequency Division Multiplexing (OFDM) transmission scheme in the 5 GHz band with variable data rates, i.e. 6 Mbit/s to 54 Mbit/s. Fig. 1 shows the transmitting node
10 1, hereafter referred to as transmitter 1, and a receiving or responding node 2, hereafter referred to as receiver 2. The transmitter 1 is located at a first location while the receiver 2 is located at a second location. Multiple of the receiver 2 can be arranged (not shown) within a WLAN. The transmitter 1 comprises a first transmit antenna 3 over which a signal, hereafter called sent signal, is transmitted and a first reception antenna 4 with
15 which an ACK (acknowledgment) signal, but also further data, is receivable. Both antennas 3, 4 also can form a unit. The transmitter 1 comprises a success counter 10 connected to a selecting unit 12, which further is connected to a decision unit 14. The transmitter 1 further comprises a failure counter (not depicted), which can be combined with the success counter 10. The success counter 10 counts the number of successful
20 transmissions s whenever one ACK (acknowledgment) signal is received via the first reception antenna 4, because then the sent signal was received by the receiver 2 and acknowledged. The selecting unit 12 gets the number of successful transmissions s from the success counter 10 and switches to an adapted transmission parameter accordingly, as described in more detail below. The adapted transmission parameter can be a different
25 data rate, packet length, or a combination thereof. A set of or multiple different transmission parameters can be provided and used. The decision unit 14 informs the selecting unit 12 in dependence of the result of a subsequent or following transmission which state the selecting unit 12 should use for its further processing. The selecting unit 12 and the decision unit 14 can form a unity. The method of working in the selecting unit
30 12 is described in more detail with reference to Fig. 2.

CH920020023

- 12 -

The receiver 2 comprises a second reception antenna 5 with which the mentioned sent signal or data is received. A second transmit antenna 6 is used to send the ACK (acknowledgment) signal out if valid data has been received.

Fig. 2 shows a schematic illustration of a state transition diagram indicating the mechanism as it is applicable by the transmitter 1 in the selecting unit 12. The mechanism allows to estimate qualitatively the changing speed of the link quality and to switch dynamically between a first value $s1$, also referred to as first threshold value $s1$, that corresponds to a first state, labeled with H, and a second value $s2$, also referred to as second threshold value $s2$, that corresponds to a second state, labeled with L, with $s1 < s2$, depending on whether one is in the region of high Doppler spread values, i.e. first state H with $s1$ depicted on the left-hand side, or in the region of low spread values, i.e. the second state L with $s2$ depicted on the right-hand side. The state transition diagram in Fig. 2 indicates three states, the first state H, the second state L, and an intermediate state, labeled with "ACK ?" and depicted above the first and second states H, L in the middle. The states are connected via arrows which represent the transition from one to another state or remaining in one state. The transition conditions are labeled accordingly and expressed as follows:

failed: $s := 0$, $f+$, and
if $f \geq f_T$, then down rate and $f := 0$

means when a transmission failed setting the success counter 10 to zero, incrementing the failure counter and when the number of faulty transmissions f equals at least the threshold of the number of faulty transmissions f_T , then reducing the data rate and setting the failure counter to zero, or

success: $s+$, $f := 0$, and
if in state H: $s \geq s1$ or if in state L: $s \geq s2$, then up rate and $s := 0$

means when a transmission was successful incrementing the success counter 10, setting the failure counter to zero and, when in the first state H the number of successful transmissions s equals or is larger than the first threshold value $s1$ or when in the second

CH920020023

- 13 -

state L the number of successful transmissions s equals or is larger than the second threshold value s_2 , then increasing the data rate and setting the success counter to zero.

The thick arrow lines indicate the switching to an adapted transmission parameter, e.g. a higher data rate.

- 5 In a preferred embodiment the first threshold value s_1 equals 3, the second threshold value s_2 equals 10, and the threshold of the number of faulty transmissions f_T equals 1.

The mechanism operates as follows. If the number of successful transmissions s equals at least to the first threshold value s_1 or the second threshold value s_2 , then a selection of and switching to an adapted transmission parameter, e.g. a higher data rate, and a transition to
10 the intermediate state "ACK ?" is performed. In the intermediate state "ACK ?" it is waited for the result of the next transmission. In dependence of the result of the next transmission, the first state H or the second state L is used.

If the next transmission succeeds, then it can be assumed that the link quality of the channel 7 is improving rapidly, i.e. high Doppler spread. Therefore, it is moved to the first
15 state H and the success threshold value s_T is set equal to the small first threshold value s_1 in order to react quickly to the changing link quality.

If however the next transmission fails, then it is assumed that the link quality of the channel 7 is either changing slowly or not changing at all, i.e. low Doppler spread, and that the former decision to switch to a higher rate was premature. Consequently, it is
20 moved to the second state L and the success threshold value s_T is set equal to the higher second threshold value s_2 .

If in the first state H a faulty transmission occurs, the first state H is retained and the success threshold value s_T remains equal to s_1 as indicated in the figure. However if in the second state L a faulty transmission occurs, it is moved to the first state H and the success
25 threshold value s_T is changed to the first threshold value s_1 .

Fig. 3 shows a schematic illustration of the throughput performance of an IEEE 802.11a WLAN in a time-varying channel. In more detail, the illustration indicates the throughput of a point-to-point link as a function of the Doppler spread at various values of s_T , the

CH920020023

- 15 -

threshold value s_2 , with $s_1 < s_2$, depending on whether one is in the region of high Doppler spread values, i.e. the first state H, or in the region of low spread values, i.e. second state L.

5 The present invention can be realized in hardware, software, or as a combination of hardware and software. Any kind of computer system - or other apparatus adapted for carrying out the methods described herein - is suited. A typical combination of hardware and software could be a general purpose computer system with a computer program that, when being loaded and executed, controls the computer system such that it carries out the methods described herein. The present invention can also be embedded in a computer
10 program product, which comprises all the features enabling the implementation of the methods described herein, and which - when loaded in a computer system - is able to carry out these methods.

Computer program means or computer program in the present context mean any
15 expression, in any language, code or notation, of a set of instructions intended to cause a system having an information processing capability to perform a particular function either directly or after either or both of the following a) conversion to another language, code or notation; b) reproduction in a different material form.

CH920020023

- 16 -

CLAIMS

1. A method for adapting a transmission parameter in a transmitting node (1) of a data communication system (8) to the current link quality of a data communication channel (7), the adapted transmission parameter being selected by the transmitting node (1) from a set of transmission parameters in dependence on a number of successful transmissions (s), the number of successful transmissions (s) being compared in the transmitting node (1) against one of a first value (s1) corresponding to a first state (H) of the transmitting node (1) and a second value (s2) corresponding to a second state (L) of the transmitting node (1), the method comprising in the transmitting node (1) the steps of:
- counting the number of successful transmissions (s);
- selecting the adapted transmission parameter
- in response to the number of successful transmissions (s) equaling or exceeding the first value (s1) when the transmitting node (1) is in the first state (H), and
- in response to the number of successful transmissions (s) equaling or exceeding the second value (s2) when the transmitting node (1) is in the second state (L);
- and
- in dependence of the result of a following transmission, operating the transmitting node (1) in one of the first state (H) and the second state (L).
2. Method according to claim 1, wherein the step of operating the transmitting node (1) in the second state (L) further comprises in the event of a faulty transmission transitioning to the first state (H).
3. Method according to any preceding claim further comprising setting the first value (s1) to 3 and the second value (s2) to 10.

CH920020023

- 17 -

4. Method according to any preceding claim further comprising counting a number of faulty transmissions (f) and selecting the adapted transmission parameter in dependence of a threshold of the number of faulty transmissions (f_T).
5. Method according to claim 4 further comprising setting the threshold of the number of faulty transmissions (f_T) to 1.
6. Method according to any preceding claim further comprising selecting the transmission parameter used by a responding receiver (2).
7. Method according to any preceding claim, wherein the step of selecting the adapted transmission parameter further comprises selecting a different data rate.
- 10 8. Method according to any preceding claim, wherein the step of selecting the adapted transmission parameter further comprises selecting a packet length different to the length used before.
9. A computer program comprising program code means for performing the method of any of the claims 1 to 8 when said program is run on a computer.
- 15 10. A computer program product stored on a computer usable medium, comprising computer readable program means for causing a computer to perform the method of any of the preceding claims 1 to 8.
- 20 11. An apparatus (1) for adapting a transmission parameter to the current link quality of a data communication channel (7), the adapted transmission parameter being selected from a set of transmission parameters in dependence on a number of successful transmissions (s), the number of successful transmissions (s) being compared against one of a first value (s_1) corresponding to a first state (H) of the apparatus and a

CH920020023

- 18 -

second value (s2) corresponding to a second state (L) of the apparatus, the apparatus comprising:

a success counter (10) for counting the number of successful transmissions (s);

a selecting unit (12) for selecting the adapted transmission parameter

5 in response to the number of successful transmissions (s) equaling or exceeding the first value (s1) when the apparatus is in the first state (H), and

in response to the number of successful transmissions (s) equaling or exceeding the second value (s2) when the apparatus is in the second state (L); and

10 a decision unit (14) which in dependence of the result of a following transmission informs the selecting unit (12) to operate in one of the first state (H) and the second state (L).

12. Apparatus according to claim 11 further comprising a failure counter for counting a number of faulty transmissions (f).

* * *

CH920020023

- 19 -

ABSTRACT

The present invention discloses an apparatus and method for adapting a transmission parameter in a transmitting node of a data communication system to the current link quality of a data communication channel. The adapted transmission parameter is selected by the transmitting node from a set of transmission parameters in dependence on a number of successful transmissions. The number of successful transmissions is compared in the transmitting node against one of a first threshold value corresponding to a first state of the transmitting node and a second threshold value corresponding to a second state of the transmitting node. The method comprises in the transmitting node the steps of (a) counting the number of successful transmissions; (b) selecting the adapted transmission parameter (b1) in response to the number of successful transmissions equaling or exceeding the first threshold value when the transmitting node is in the first state, and (b2) in response to the number of successful transmissions equaling or exceeding the second threshold value when the transmitting node is in the second state; and in dependence of the result of a following transmission, operating the transmitting node in one of the first state and the second state.

[Fig. 2]

CH920020023

1/2


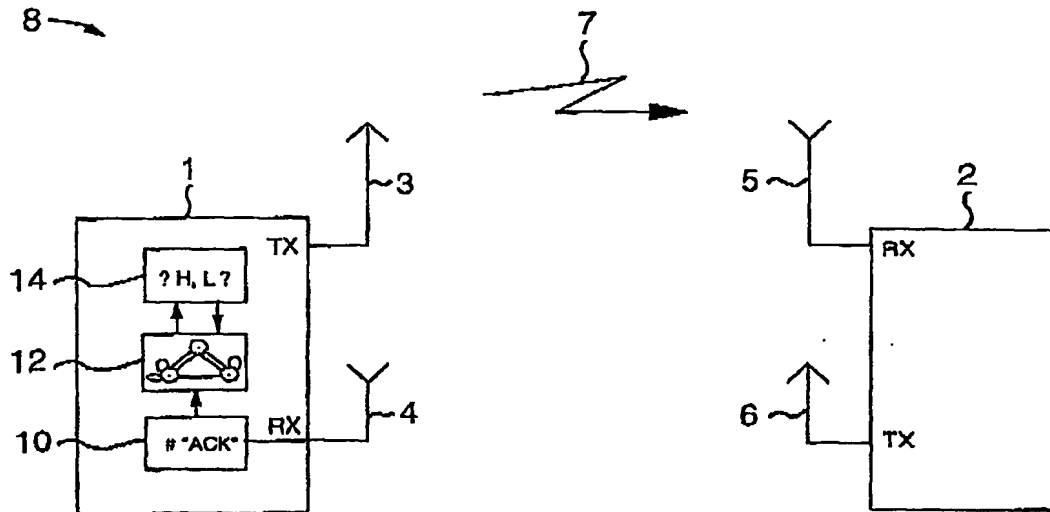


Fig. 1

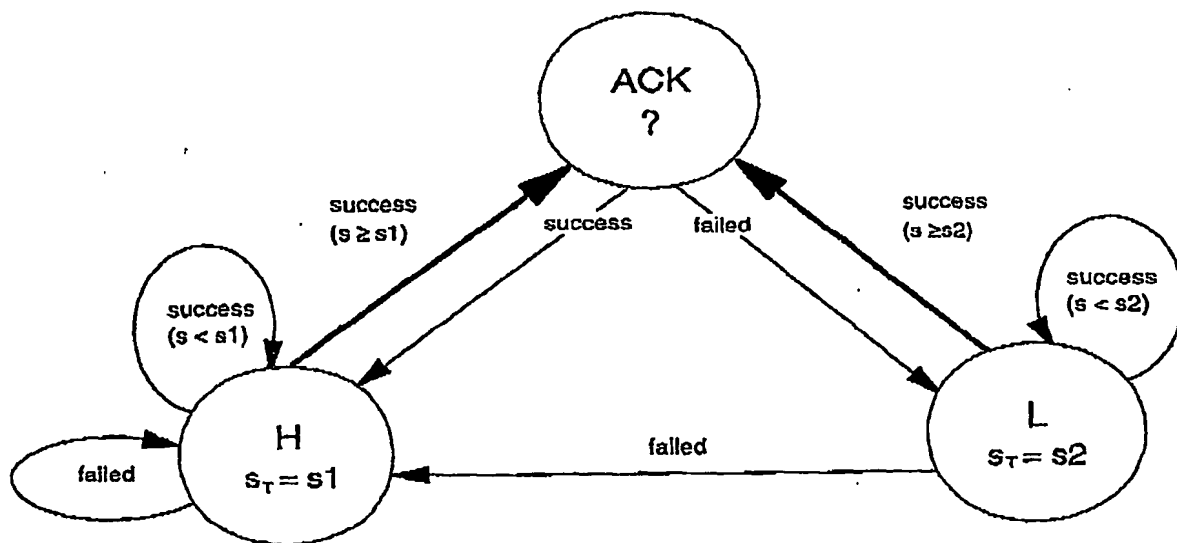

failed: $s := 0, f+$, and
 if $f \geq f_T$, then down rate and $f := 0$
 success: $s+, f := 0$, and
 if in state H: $s \geq s1$ or in state L: $s \geq s2$, then up rate and $s := 0$

e.g.: $f_T = 1, s1 = 3, s2 = 10$

Fig. 2

CH920020023

2/2

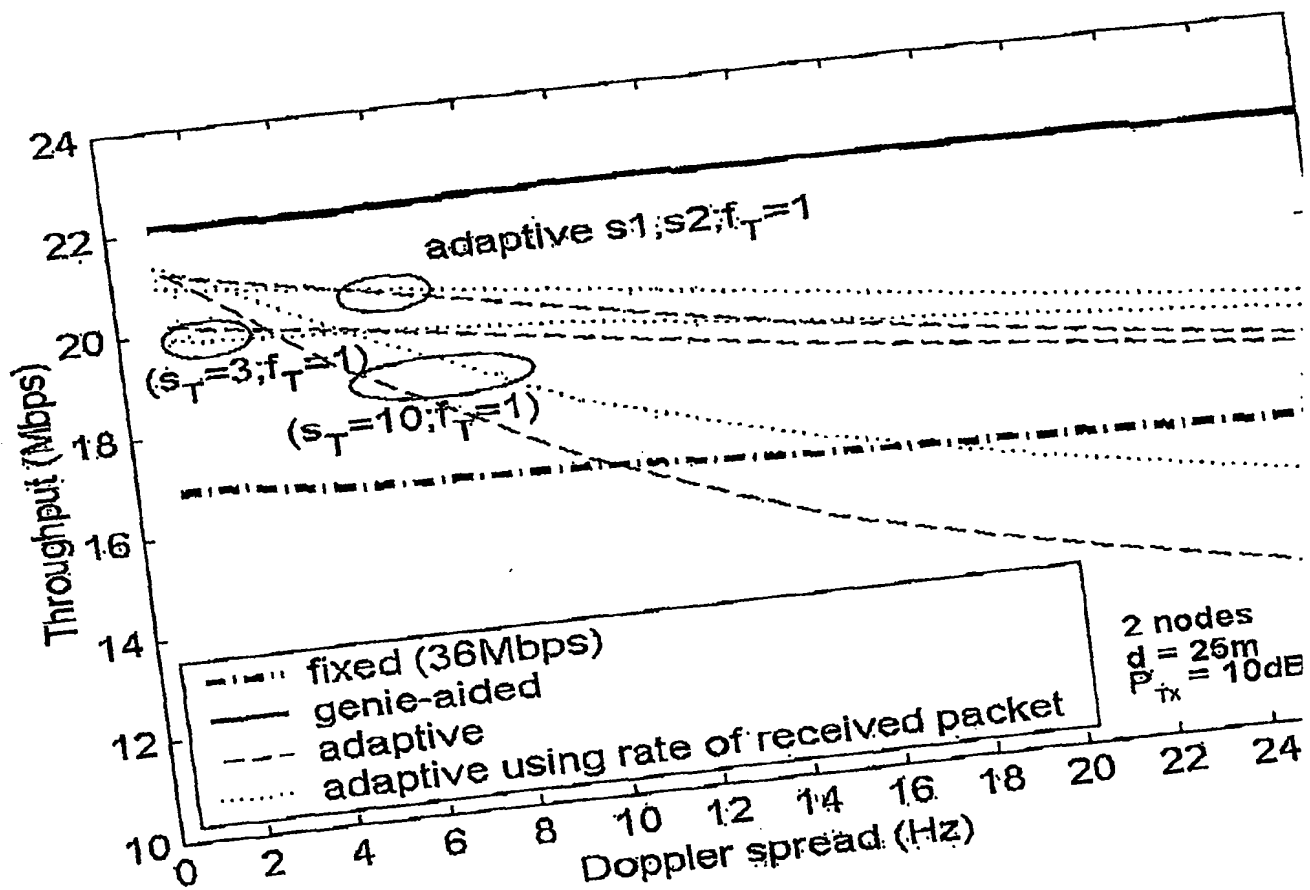


Fig. 3

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.